



IQL

Phoenix Mini

SERIES

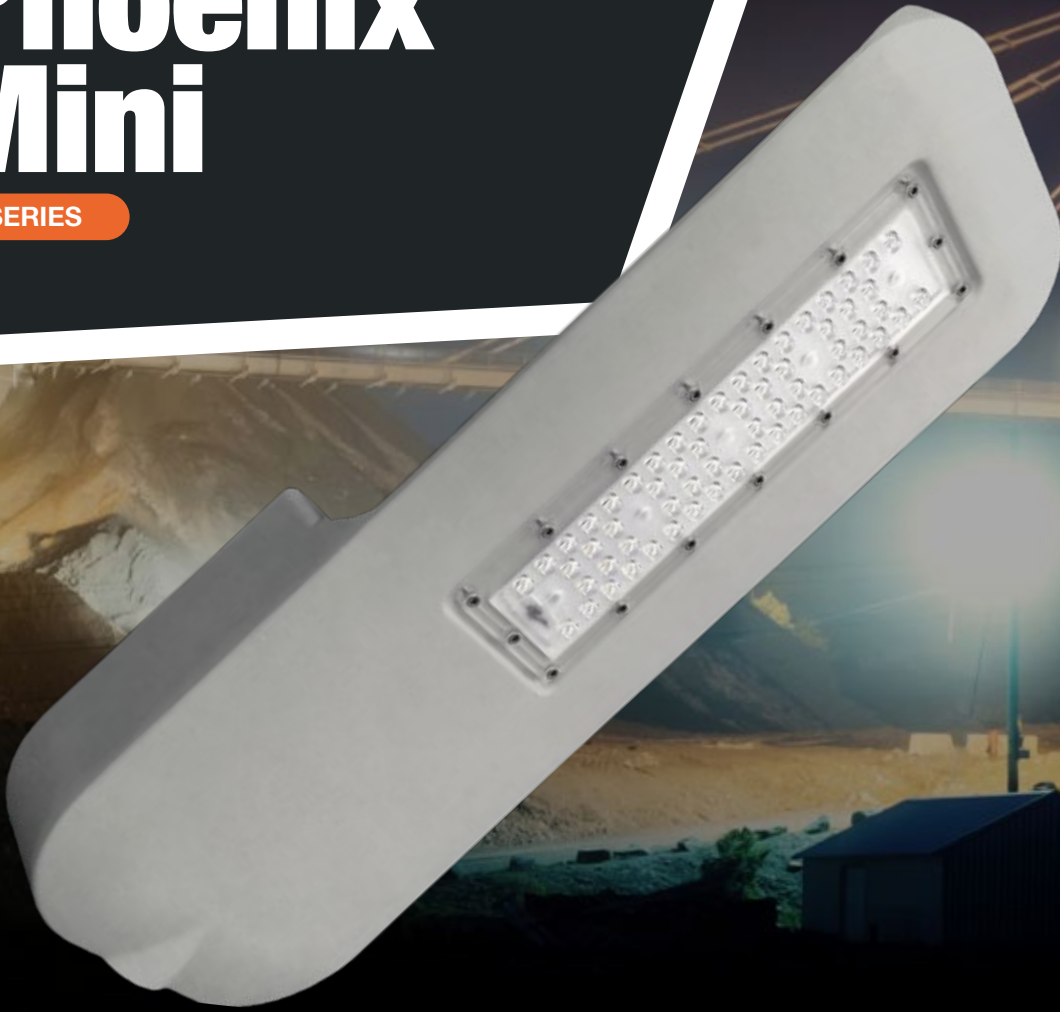

PATHWAY, CARPARK & INDUSTRIAL

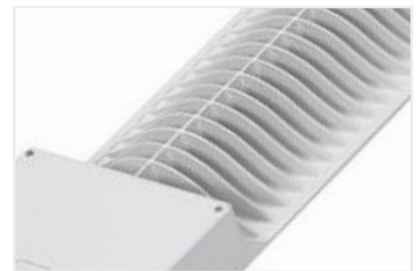

TECHNICAL

Light Source	Lumileds
Body	Heavy Duty Die Cast Aluminium
Colour Temperature	2700-5000K (also available in NSP Amber* options)
Average LED and Control Gear Life	L90 >50,000 hrs
Beam Angle	Type II 50° x 150° Asymmetrical
Efficacy	130 Lm/w
CRI	> 80
IK Rating	IK10
Exterior Colour	Grey RAL 9007
Junction Temperature	130°C
Thermal Management	Aluminium Heatsink
Cooling	Conduction, Convection
Operating Range Tc	-45°C to 50°C
Operating Humidity	0% to 90% RH




Spigot Size: 38mm

ELECTRICAL

Power Supply Constant Current	Inventronics
Protection	Over Voltage, Short Circuit and Over Temperature
Power Factor	> 0.95
Ingress Protection Rating	IP66
Warranty	3 Years

PHOTOMETRY

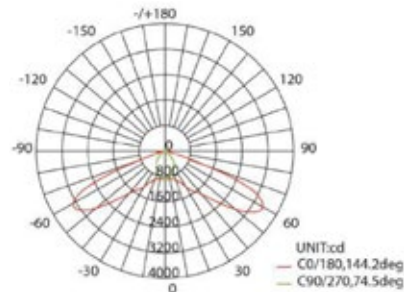

All published Luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited Laboratory.

ORDER CODES

Model	Lumens	Wattage	Light Colour*	Weight	Size (in mm)		
					A	B	C
LL-3197WW	2,600Lm	20 watts	Warm White 2700K	2.8kg	460	173	53
LL-3197CW	2,600Lm	20 watts	Cool White 5000K	2.8kg	460	173	53
LL-3199WW	6,500Lm	50 watts	Warm White 2700K	2.8kg	460	173	53
LL-3199CW	6,500Lm	50 watts	Cool White 5000K	2.8kg	460	173	53

NOW AVAILABLE IN DC:

LL-3198-12-DC	3,900Lm	30 watts	Cool White 5000K	2.8kg	460	173	53
LL-3198-24-DC	3,900Lm	30 watts	Cool White 5000K	2.8kg	460	173	53

ACCESSORIES

LL-BRACKET	316 Stainless Steel Bracket Wall / Corner Mount
LL-EM	Emergency Pack Remote (By Clevertronics)
LL-PE	PE Cell and back plate.
LL-4060	40mm to 60mm adaptor.



SMARTER LIGHTING SOLUTIONS

IQL Australia
6/24 Yalgar Rd, Kirrawee NSW 2232
www.iqlighting.com.au
1300 475 444

Technical Data sheets available on request. Model appearance may vary.
July 2020 specifications are subject to change without prior notice.



*NatureSpec wildlife safe amber light available on request