


# Rhino Wall Pack

SERIES



***HIGH QUALITY INDUSTRIAL  
LED WALL PACKS***

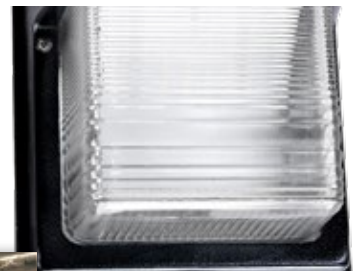



## TECHNICAL

|  |                           |
|--|---------------------------|
| <b>Body</b>                              | Japanese Nichia SMD       |
| <b>Colour Temperature</b>                | 3000K and 4000K available |
| <b>Average LED and Control Gear Life</b> | >50,000 hrs               |
| <b>Beam Angle</b>                        | 100 degrees (Symmetrical) |
| <b>Efficacy</b>                          | 127 Lm/w                  |
| <b>CRI</b>                               | > 72                      |
| <b>Max Junction Temperature</b>          | 150°C                     |
| <b>Cooling</b>                           | Conduction, Convection    |
| <b>Thermal Management</b>                | Aluminium Heatsink        |



## ELECTRICAL

|  |   |
|--|---|
| <b>Power Supply</b>                    | 1000-277VAC   |
| <b>Protection</b>                      | Over Voltage, Short Circuit and Over Temperature    |
| <b>Power Factor:</b>                   | > 0.96  |
| <b>Total Harmonic Distortion (THD)</b> | <15%  |
| <b>IP Rating:</b>                      | IP65  |
| <b>IK Rating:</b>                      | IK10  |
| <b>Certification</b>                   | AS/NZS (RCM)<br>AS/NZS 60598.2.2, AS/NZS 4417 (RCM) |
| <b>Warranty</b>                        | 3 Years   |



## ORDER CODES

| Model                                     | Wattage  | Light Colour | Lumens  | Input Voltage | Weight | Size (in mm) |     |     |
|---|----------|--------------|---------|---------------|--------|--------------|-----|-----|
|   |          |              |         |               |        | A            | B   | C   |
| <b>WP-02</b>                              | 22 watts | 4,000K       | 2,540Lm | AC100-265V    | 1.2kg  | 225          | 170 | 160 |
| <i>The 22w is an alternative for 70w</i>  |          |              |         |               |        |              |     |     |
| <b>WP-04</b>                              | 60 watts | 4,000K       | 8,397Lm | AC100-265V    | 2.9kg  | 330          | 240 | 190 |
| <i>The 60w is an alternative for 150w</i> |          |              |         |               |        |              |     |     |



**SMARTER LIGHTING SOLUTIONS**  
**IQL Australia**  
 6/24 Yalgar Rd, Kirrawee NSW 2232  
[www.iqlighting.com.au](http://www.iqlighting.com.au)  
 1300 475 444

Technical Data sheets available on request. Model appearance may vary.  
 July 2020 specifications are subject to change without prior notice.