




SPECIALIST TENNIS COURT LIGHTING



ARIZONA PRO-V

SERIES

DON'T LET BAD LIGHTING HALT PLAY



TECHNICAL

Light Source	Lumileds 5050
Body	Die Cast Aluminium Alloy
Body Colour	RAL 9004 Signal Black
Fasteners	Stainless Steel
Colour Temperature	5000K (also available in 3000K, 4000K & NSP Amber* options)
Average LED and Control Gear Life	L70 >50,000 hrs Ta 25*c
Beam Angle	T3VS
Efficacy	170 Lm/w
CRI	80
Cut Off Classification	Full Cut Off (BUG rating = 0)
Lens Material	Mitsubishi Optical Grade Polycarbonate UV Rated

ELECTRICAL

Power Supply Constant Current	Inventronics 100-277Vac (347-480Vac option)
Dimming Options	0-10v / PWM / Timer / DALI
Protection	6kV Line-Line, 10kV Line-Earth (10kV & 20kV SPD available)
Power Factor	> 0.9
Connection Lead	1.5m Rubber Flex
Ingress Protection Rating	IP66
Impact Rating	IK10
Certification	RCM, EMC, CE
Warranty	3 Years

ACCESSORIES

ACCESSORIES: ORDER SEPARATELY

Type A - Slip Fitter

Type B - Adjustable Arm Mount
Designed for easy installation. Simple, single-person installation is the key to making the most of AreaSpec's easy-to-work-with, non-metal job site.

Type C - Yoke Mount w/ Square Flacker




CONSTRUCTION FEATURES

1. Quick Release Design
2. Power isolation on OPEN
3. Class I / Class II Dimmable Driver
4. Photoelectric Cell Option
5. Mounting Options - See Below
6. Spigot Size Slip Fit 60mm OD



1. Space reserved for photocell sensor
2. Space reserved for occupancy sensor with waterproof seal
3. Tool-free maintenance


PHOTOMETRY

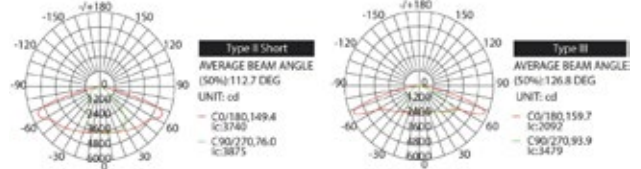

All published Luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited Laboratory.

ORDER CODES

Model	Wattage	Lumens	Weight	Size (in mm)					
				A	B	C	D	E	F
ARI-420	420w	71,400Lm	10.5kg	75	360	77	165	750	150

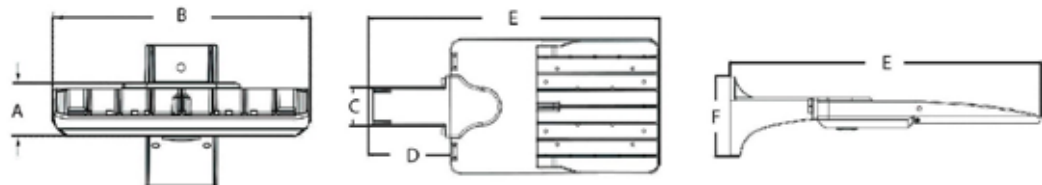

SMARTER LIGHTING SOLUTIONS

IQL Australia
6/24 Yalgar Rd, Kirrawee NSW 2232
www.iqlighting.com.au
1300 475 444

Technical Data sheets available on request. Model appearance may vary. July 2020 specifications are subject to change without prior notice.



*NatureSpec wildlife safe amber light available on request