


Aire
STADIUM SERIES

IQL



**UGR
<19**

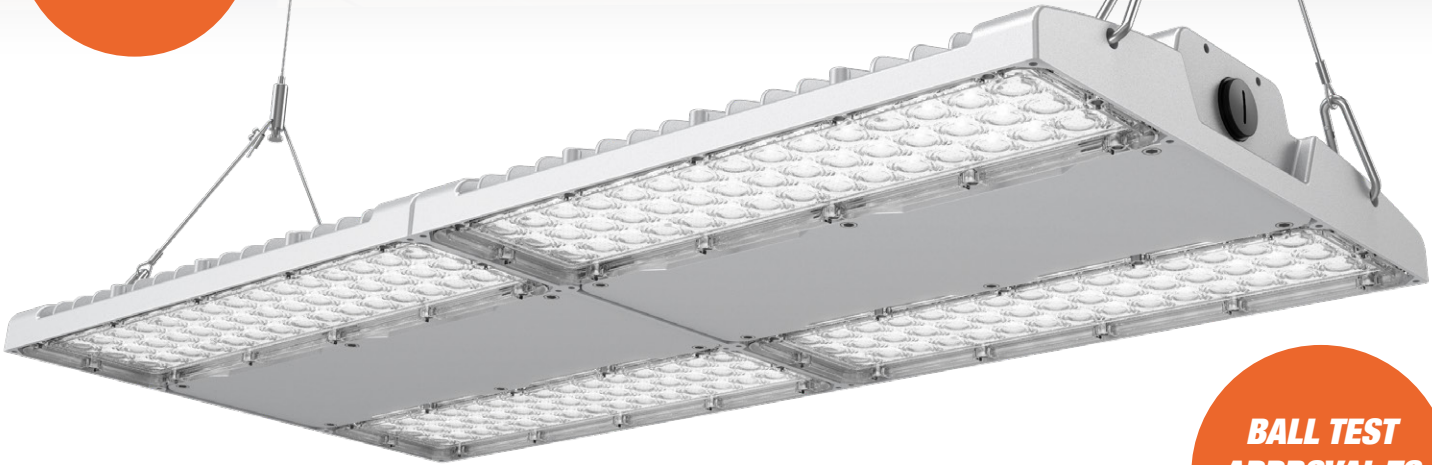

**BALL TEST
APPROVAL TO
DIN57710-13**

**INDOOR SPORTS STADIUM,
WAREHOUSE, FACTORY,
INDUSTRIAL FACILITY,
GYMNASIUM, EXHIBITION CENTRES**



TECHNICAL

Light Source	Lumiled
Housing Material	Aluminium Alloy/Powder Coating
Housing Colour	Tele Grey (RAL 7407)
Colour Temperature:	5000K (3000K, 4000K optional)
Average LED Life Projection:	>82,000hr L80
Beam Angle:	Asymmetrical and Symmetrical
Efficacy	155Lm/w
CRI	Ra 70 (Ra80 optional)
Lumen output:	15500Lm – 74400Lm

ELECTRICAL

Power Supply	Inventronic
Diming Options	0-10V, DALI, ZIGBEE
Protection:	Over Voltage, Short circuit and Over Temperature
Power Factor:	>0.91
Ingress Protection Rating	IP66
Impact Rating	IK10
Temperature Operating Range	0-30°C to +50°C
Certification	RCM

ORDER CODES

Model	CCT	Lumens	Weight
AIRE-100	5000k	15,500Lm	3kg
AIRE-150	5000k	23,250Lm	3kg
AIRE-200	5000k	31,000Lm	6.7kg
AIRE-240	5000k	37,200Lm	6.7kg
AIRE-300	5000k	46,500Lm	6.7kg
AIRE-400	5000k	62,000Lm	10.5kg
AIRE-480	5000k	74,400Lm	10.5kg

KEY FEATURES

- Quality Mitsubishi PC Lens
- SS304 Cable Gland and Respirator Valve
- Vibration Proof WAGO connectors



AIRE SERIES SETS NEW STANDARDS IN DESIGNS FOR INDOOR SPORTS STADIUMS

Technical Data sheets available on request. Model appearance may vary. | March 2025 specifications are subject to change without prior notice.