

PHOENIX MINI GEN 2

COMMERCIAL/INDUSTRIAL

IQL



***PATHWAY,
CARPARK
INDUSTRIAL***

CCT + POWER CHANGE




TECHNICAL

Light Source	Lumiled
Body	Die-cast aluminium
Colour Temperature:	2700/4000/5000 (optional)
Average LED & Control Gear Life Projection	> 100,000hrs L70
Beam Angle:	Type II (other options available)
Efficacy:	150 Lm/W
CRI:	Ra70
Mounting Options	Side Entry/Post Top (60mm OD)
Housing Colour	RAL 9006 Grey (Black option)

ELECTRICAL

Wattage	10W-50W - Interchangeable
Power Supply	Inventronics
Protection:	2kV line-line, 4kv Line-earth
Power Factor:	>0.96
Ingress Protection Rating	IP66
Impact Rating	IK10
Certification	RCM

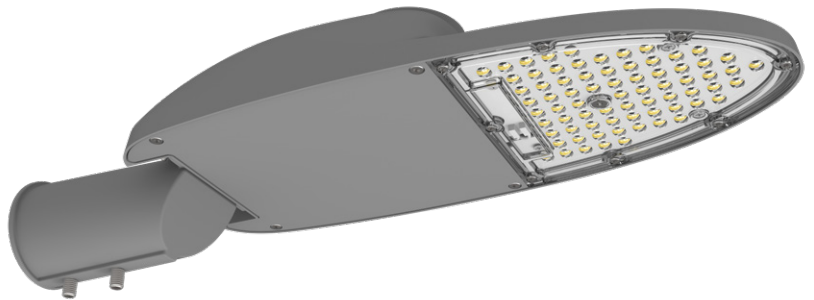

ORDER CODES

Model	CCT	Lumens	DIMENSIONS (MM)	Weight
PHXMG2-25W	2700-5000k	10W 1500Lm	451x157x110	2kg
		20W 3000Lm		
		25W 3750Lm		
PHXMG2-50W	2700-5000k	30W 4500Lm	451x157x110	2kg
		40W 6000Lm		
		50W 7500Lm		
PHXMG2-50W-BK	2700-5000k	30W 4500Lm 40W 6000Lm 50W 7500Lm	451x157x110	2kg

KEY FEATURES

- Die cast aluminium fixture is durable
- High lumen output
- Special designed PC optics lens
- CCT + Power Change

Technical Data sheets available on request. Model appearance may vary. | March 2025 specifications are subject to change without prior notice.