


VUSO Xtreme

COMMERCIAL/INDUSTRIAL

IQL

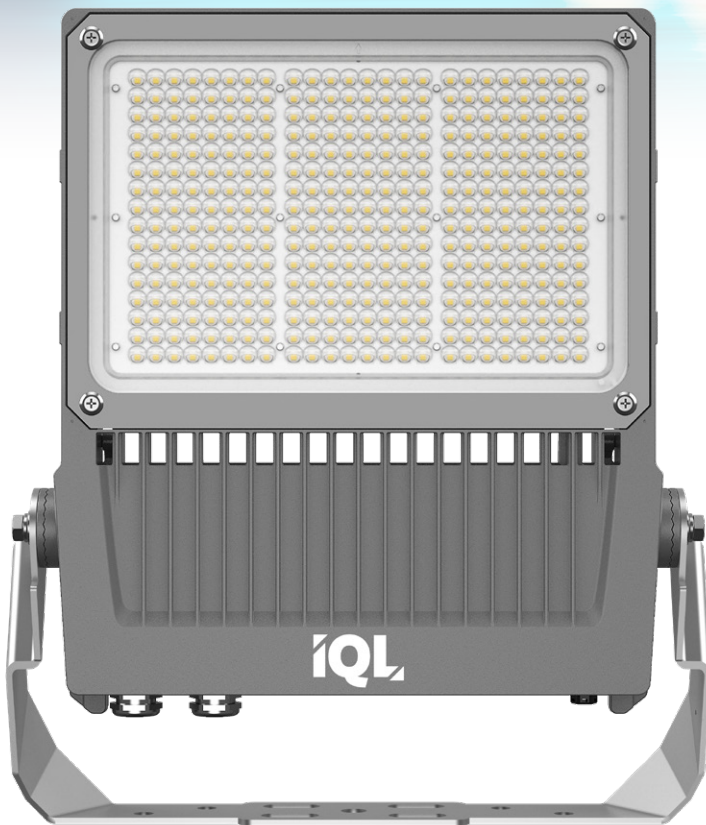

HARSH ENVIRONMENT
COASTAL, MINING, MARINE



TECHNICAL

Light Source	Lumiled
Body	Anti-corrosion, high pressure die-cast aluminium
Colour Temperature:	5000K (3000k, 4000k and NSP Amber* available)
Average LED & Control Gear Life Projection	>110000hrs L70
Beam Angle:	Asymmetrical and symmetrical
Efficacy:	150 Lm/W
CRI:	Ra70
Mounting Options	Trunnion Bracket
Housing Colour	Grey

ELECTRICAL


Wattage	275W
Power Supply Constant Current	Inventronics
Dimming Options	1-10V (Dali optional)
Protection:	10KV SPD
Power Factor:	>0.92
Ingress Protection Rating	IP66
Impact Rating	IK09
Certification	RCM

ORDER CODES

Model	CCT	Lumens	DIMENSIONS (MM)	Weight
IQL-VUSXT275W	5000K	41250 Lm/W	516 x 464 x 100	9.2kg

KEY FEATURES

- Anti-corrosion, C4 aluminium
- High Pressure die-cast aluminium
- Loop in and loop out compatibility

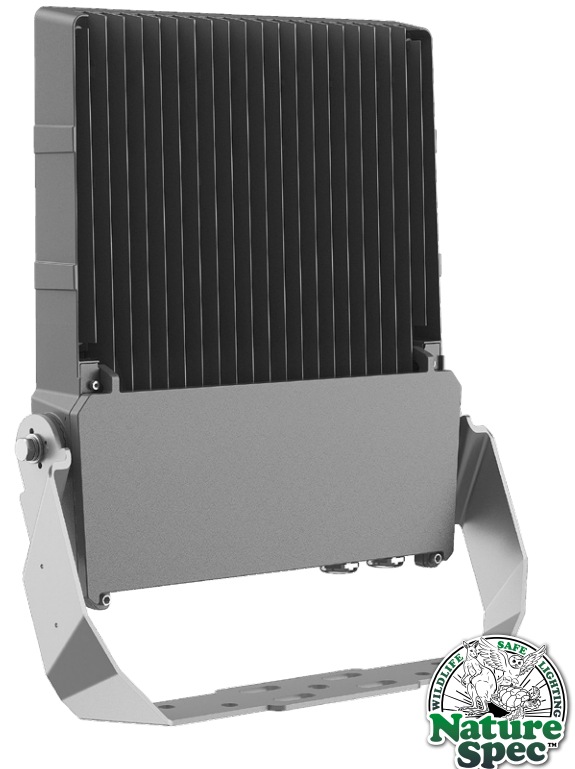

Technical Data sheets available on request. Model appearance may vary. | March 2025 specifications are subject to change without prior notice.

*NatureSpec wildlife safe amber light available on request