


RHINO 69K ELV

SERIES

NON-
FLICKER

IQL

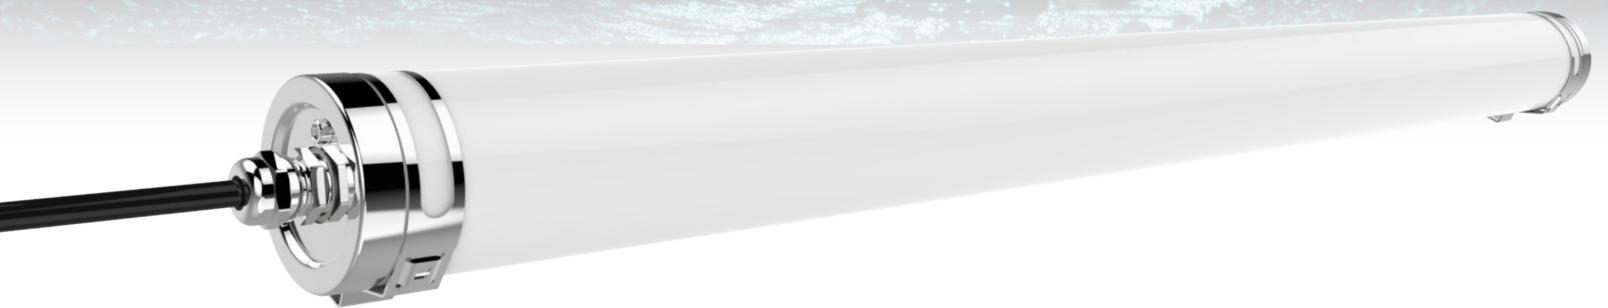

INDUSTRIAL EXTRA LOW VOLTAGE APPLICATIONS



TECHNICAL

Light Source	Lumiled
Body	PC/PMMA
Colour Temperature:	5000K
Average LED & Control Gear Life Projection	>78,000 hrs - L70
Beam Angle:	120 degree
Efficacy:	150 Lm/W
CRI:	>80
Max Junction Temperature	150°C
Cooling	Conduction, convection
Operating Range	-20°C – 50°C
Thermal Management	Aluminium Heatsink

ELECTRICAL

Power Supply	ELV 23-35VAC, 22-48VDC
Protection:	Over Voltage, Short Circuit and Over Temperature
Power Factor:	>0.96
Ingress Protection Rating	IP69K (IP67)
Impact Rating	IK10
Certification	RCM

ORDER CODES

Model	Wattage	Light Colour	Lumens	Dimensions	A	B
RWP69K-1200-ELV	40W	5000K	6000	1200 x 70mm	3.3mm	70mm

KEY FEATURES

Impact Resistant
Corrosion Resistant
Extra low voltage area lighting
Temporary lighting
Task lighting



Technical Data sheets available on request. Model appearance may vary. | March 2025 specifications are subject to change without prior notice.

*NatureSpec wildlife safe amber light available on request