

RHINO 69K MMA

SS316 IMPACT BARRIER CAGE

AVAILABLE IN ELV

IQL



**INDUSTRIAL
APPLICATIONS**



TECHNICAL

Body	PMMA/316 STAINLESS STEEL
Colour Temperature:	5000K
Average LED & Control Gear Life Projection	>78,000 hrs (L70/Ta25c)
Beam Angle:	120 degree
Efficacy:	140 Lm/W
CRI:	>80
Max Junction Temperature	150C
Cooling	Conduction, Convection
Operating Range	20° C - 40° C
Thermal Management	Aluminium Heatsink

ELECTRICAL


Voltage	198-264 VAC
Protection:	Over Voltage, Short Circuit and Over Temperature
Power Factor:	>0.96
Ingress Protection Rating	IP69K
Impact Rating	IK11+
Certification	RCM

ORDER CODES


Model	Wattage	CCT	LUMEN	Dimensions MM	Weight KG
69K-MMA-600	20W	5000K	2800Lm	595 x 232 x 222	2
69K-MMA-600EM	20W	5000K	2800Lm	595 x 232 x 222	2
69K-MMA-1200	40W	5000K	5600Lm	1200 x 232 x 222	2.5
69K-MMA-69K-1200EM	40W	5000K	5600Lm	1200 x 232 x 222	2.5

KEY FEATURES

- 316 Impact Barrier Cage
- Mount of Suspension Mount
- Environmentally friendly, no mercury, No UV, No IR
- ELV option available

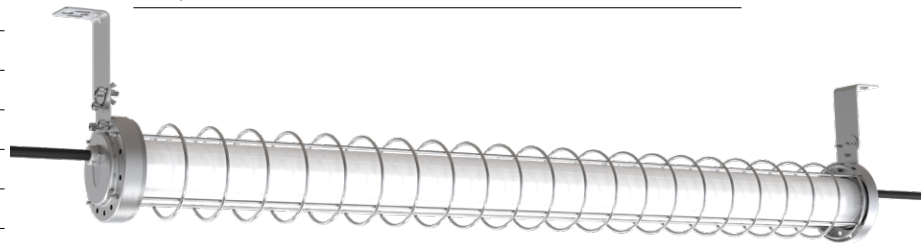

AVAILABLE IN ELV

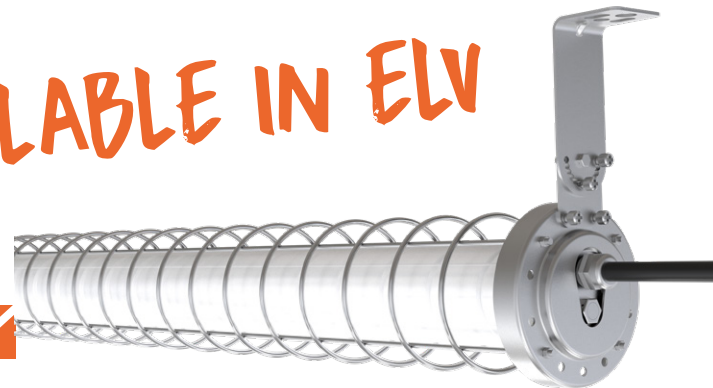

*NatureSpec wildlife safe amber light available on request

Technical Data sheets available on request. Model appearance may vary. | March 2025 specifications are subject to change without prior notice.