

SABRE II

IQL



***INDOOR AND OUTDOOR HIGH CEILING
WAREHOUSE, FACTORY, INDUSTRIAL,
CHEMICAL FACILITIES***



TECHNICAL

Light Source	Lumiled
Body	ALUMINIUM
Colour Temperature:	4000K (3000K, 5000K optional)
Average LED & Control Gear Life Projection	>85,000 hrs - L80
Beam Angle:	60D, 90D Asymmetrical
Efficacy:	160 Lm/W
CRI:	>80
Max Junction Temperature	150°C
Cooling	CONVECTION
Operating Range	30°C to 50°C

ELECTRICAL


Power Supply	Inventronics
Input Voltage	90-305VAC, 50/60Hz
Protection:	4kV line-line, 6kV line-earth
Power Factor:	>0.95
Ingress Protection Rating	IP65
Impact Rating	IK10
Certification	RCM

ORDER CODES

MODEL	Wattage	CCT	LUMEN	Weight	DIMENSION
SABG2-100	100W	5000K	16000Lm	3.66	634 x 136 x 93
SABG2-150	150W	5000K	24000Lm	5.15	926 x 136 x 93
SABG2-200	200W	5000K	32000Lm	5.7	948 x 137 x 102
SABG2-240	240W	5000K	38400Lm	6.9	1178 x 137 x 102

KEY FEATURES

- Modular design and excellent performance
- Long and narrow pattern for best uniformity
- 5 types of beam angle
- multiple mounting options
- Intelligent control for energy saving

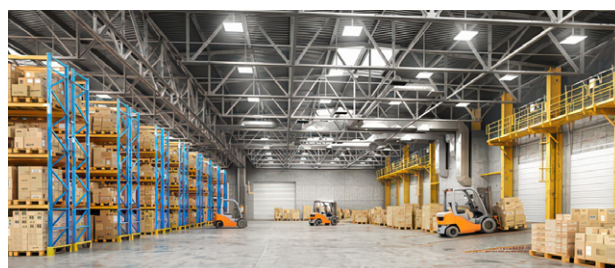

Technical Data sheets available on request. Model appearance may vary. | March 2025 specifications are subject to change without prior notice.