

ZENVO SHOOTER 240W

PRECISION LED FLOOD LIGHTING



***HEAVY DUTY INDUSTRIAL
FLOOD LIGHTING***





TECHNICAL

Light Source	Nichia
Body	Die-Cast Aluminium
Colour Temperature	Stock available in 2700K & 5000K (other options and NSP Amber* available)
Average LED and Control Gear Life	>100,000 hrs L70
Beam Angle	5° / 24° / 40° / 60° / 100° & Asymmetrical
Efficacy	135 Lm/w
CRI	> 70 standard with > 80 available on request
Max Junction Temperature	150°C
Cooling	Conduction, Convection
Operating Range Tc	-40°C to +65°C
Operating Humidity	< 95% relative humidity
Thermal Management	Aluminium Heatsink

ELECTRICAL

Power Supply	Inventronics
Voltage	230VAC, 415VAC
Input Surge Protection	6 kV line-line, 10 kV line-earth
All-Around Protection	OVP, SCP, OTP
Protection	Waterproof (IP67) and UL Dry / Damp / Wet Location
Ingress Protection Rating	IP66
Impact Rating	IK09
Safety	SELV Output

ORDER CODES

Model	Wattage	Light Colour	Lumens*	Weight*	Size (in mm)		
					A	B	C
ZEN240	240 watts	See above	32,400	6.0kg	335	295	189

"x" in the model number denotes beam angle - 15 / 24 / 40 / 60 / 100 or Asymmetrical
*Weights are quoted without drivers.

Technical Data sheets available on request. Model appearance may vary. | March 2025 specifications are subject to change without prior notice.

KEY FEATURES

Designed and made in Australia - Built by Australians for Australian conditions.


Powerful 240w LED Light Engine 32,400lm.

Colour temperatures - 5000K and 2700K.

Lens options are Narrow 24D / Medium 60D / Wide 100D Beam Angles (100D is standard).

Glare shield optional.

Bracket and hardware 316 Stainless Steel.

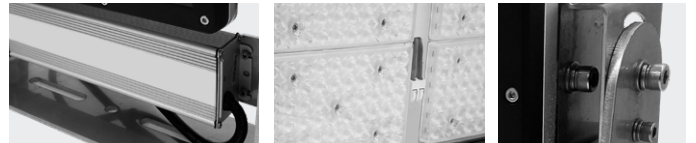

INSTALLATION

Rec. Mounting Height 240w: 6-12m



*NatureSpec wildlife safe amber light available on request